

# MK-W001



L01 METALLIC RED GLOSSY



L01 PINK MATT



L01 LEMON YELLOW MATT



L01 METALLIC BLUE GLOSSY



L01 WHITE MATT



L01 BLACK MATT

CONSTRUCTION	Glued – In
LINER	Expanded Polystyrene [EPS]
TOP SHELL	ABS Hi-Density Injection Moulded Hardshell
VENTS	11 Vents
SIZE	S(51-54cm)340gms , M(55-58cm)360gms , L(59-61cm)410gms
STANDARDS	CE EN1078, CPSC 1203, ASTM F1447


# MK-W006



L06 ORANGE MATT



L06 CYAN MATT

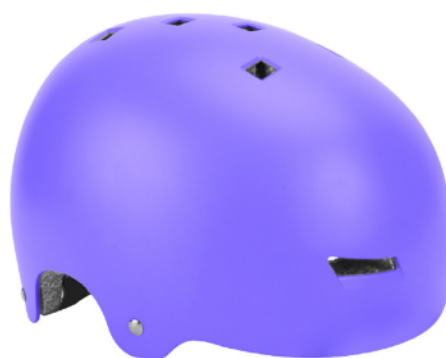

L06 PURPLE MATT



L06 GRAY MATT



L06 WHITIE MATT

CONSTRUCTION	Glued – In
LINER	Expanded Polystyrene [EPS]
TOP SHELL	ABS Hi-Density Injection Moulded Hardshell
VENTS	13 Vents
SIZE	S(51-54cm)380gms , M(55-58cm)425gms , L(59-61cm)430gms
STANDARDS	CE EN1078, CPSC 1203, ASTM F1447

# MK-W008



L08 BLACK MATT



L08 WHITE MATT



L08 PINK MATT



L08 GREEN MATT



L08 BLUE MATT

CONSTRUCTION	Glued – In
LINER	Expanded Polystyrene [EPS]
TOP SHELL	ABS Hi-Density Injection Moulded Hardshell
VENTS	17 Vents
SIZE	M(55-58cm)400gms , L(59-61cm)380gms
STANDARDS	CE EN1078, CPSC 1203, ASTM F1447

# MK-W030



L30 CYAN MATT



L30 BLACK MATT



L30 BLUE MATT



L30 BEIGE MATT



L30 LEMON YELLOW MATT



L30 PINK MATT



L30 OFF-WHITE MATT

CONSTRUCTION	Glued – In
LINER	Expanded Polystyrene [EPS]
TOP SHELL	ABS Hi-Density Injection Moulded Hardshell
VENTS	9 Vents
SIZE	XS(48-50cm)340gms , S(51-54cm)350gms , M(55-58cm)400gms , L(59-61cm)410gms.
STANDARDS	CE EN1078, CPSC 1203, ASTM F1447.



# MK-W099



L99 WHITE MATT



L99 CHERRY MATT



L99 ORANGE MATT



L99 PURPLE MATT



L99 BLUE MATT



L99 BLACK MATT

CONSTRUCTION	Glued – In
LINER	Expanded Polystyrene [EPS]
TOP SHELL	ABS Hi-Density Injection Moulded Hardshell
VENTS	12 Vents
SIZE	S(51-54cm)350gms , M(55-58cm)405gms , L(59-61cm)420gms
STANDARDS	CE EN1078, CPSC 1203, ASTM F1447

# MK-W109



109 BLUE MATT



109 GRAY MATT



109 CHOCOLATE MATT



109 BLACK MATT



109 RED MATT



109 GRAYISH WHITE MATT

CONSTRUCTION	Glued – In
LINER	Expanded Polystyrene [EPS]
TOP SHELL	ABS Hi-Density Injection Moulded Hardshell
VENTS	12 Vents
SIZE	S(48-54cm)350gms , M(54-57cm)380gms , L(57-61cm)450gms
STANDARDS	CE EN1078, CPSC 1203, ASTM F1446